
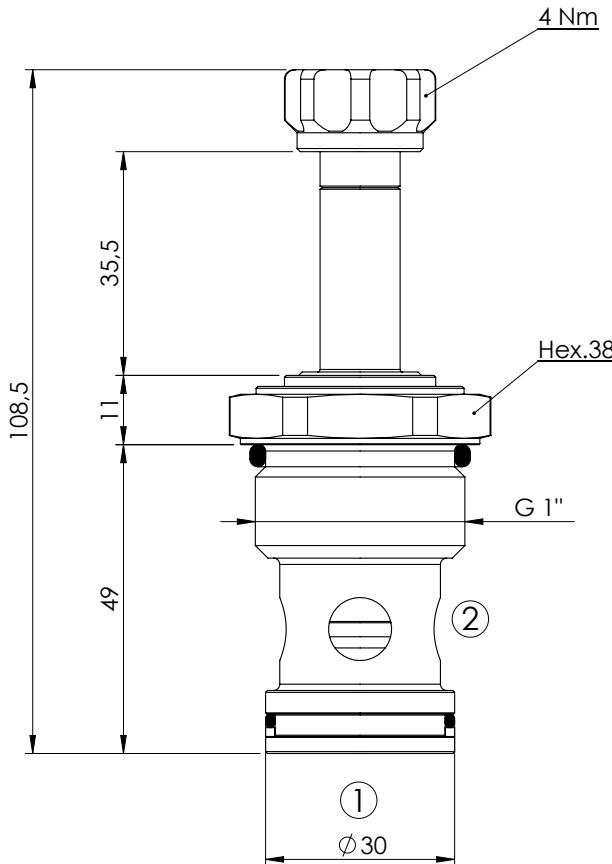


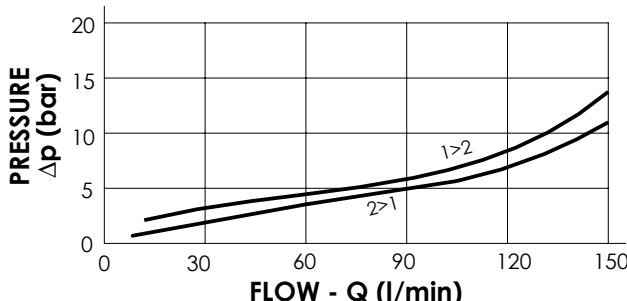




SOLENOID OPERATED CARTRIDGE		<div>Atlantic Fluid Tech</div>															
CEBP-150-NCFN		PILOT OPERATED POPPET TYPE															
<div></div>		<div></div> <div></div> <div><div>SPECIFICATIONS</div><table><tr><td>Max. operating pressure:</td><td>350 bar</td></tr><tr><td>Rated flow:</td><td>150 l/min</td></tr><tr><td>Cavity:</td><td>VP000013</td></tr><tr><td>Weight:</td><td>0,35 kg</td></tr><tr><td>Min. voltage required:</td><td>90% of nominal</td></tr><tr><td>Coil type:</td><td>M7</td></tr></table><div>NOTES</div><table><tr><td>Installation torque:</td><td>80 - 100 Nm</td></tr></table></div>		Max. operating pressure:	350 bar	Rated flow:	150 l/min	Cavity:	VP000013	Weight:	0,35 kg	Min. voltage required:	90% of nominal	Coil type:	M7	Installation torque:	80 - 100 Nm
Max. operating pressure:	350 bar																
Rated flow:	150 l/min																
Cavity:	VP000013																
Weight:	0,35 kg																
Min. voltage required:	90% of nominal																
Coil type:	M7																
Installation torque:	80 - 100 Nm																
<div></div>		<div><div><div></div><div>Standard</div></div><div><div></div><div>Knob style override</div></div></div>															
ORDERING CODES																	
Quick code	Description	Options															
CE000053	CEBP-150-NCFN-31-013-N350	Standard															
CE000054	CEBP-150-NCFE-31-013-N350	Knob style override															