


fan kit 0385, 12V / 24V DC

for oil/air blast coolers ASA 0176/0177/0256/0257, TT 16/25

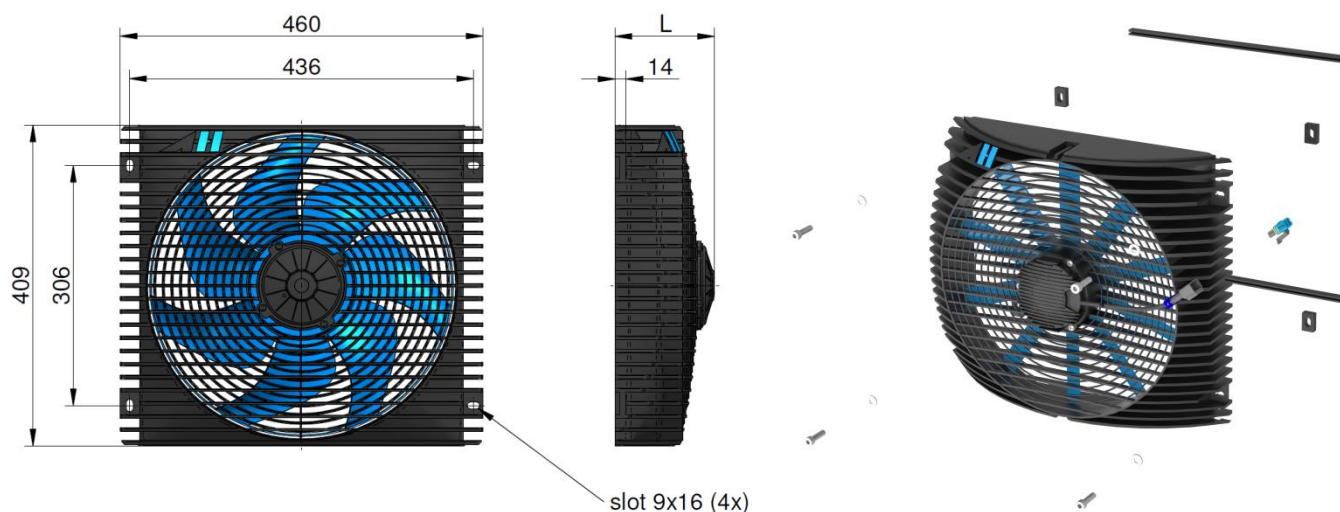


Technical Data *)

order number	description	current**) [A]	motor power [kW]	protection level	L [mm]	weight [kg]
ILLELE0385A1	fan kit 0385, 12V DC	21,2 ±3	0,242	IP 68	130	4,8
ILLELE0385A2	fan kit 0385, 24V DC	11,4 ±3	0,242	IP 68	130	4,8

**) given data are running currents, free air flow, for start up higher currents have to be calculated!

Performance Data

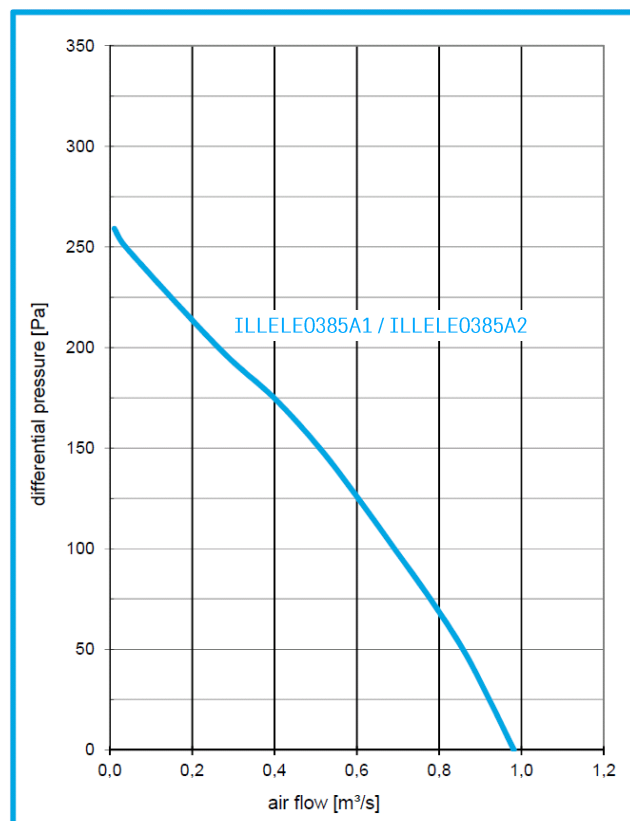

ambient conditions

ambient temperature range	-20°C to +80°C
storage temperature range	-40°C to +120°C
Important: Assure sufficient air circulation!	

supply

12V DC ± 10%	24V DC ± 10%
maximum allowed ripple	1%
Check for right polarity! Inverse polarity may damage the fan!	

recommended fuse (slow acting)

ILLELE0385A1	30 A
ILLELE0385A2	15 A

housing

material	polyamide
----------	-----------

accessories

temperature control	ILLZTC12K, ILLZTC24K
---------------------	----------------------

content of fan kit

1x fan unit, 4x screws, 4x screw nuts, 8x washer, 2 sealing profiles, 1x counter connector, 4x distance blocks

*) all data refer to tests with 13V and 26V DC, respectively

Please contact us for further options and assistance.