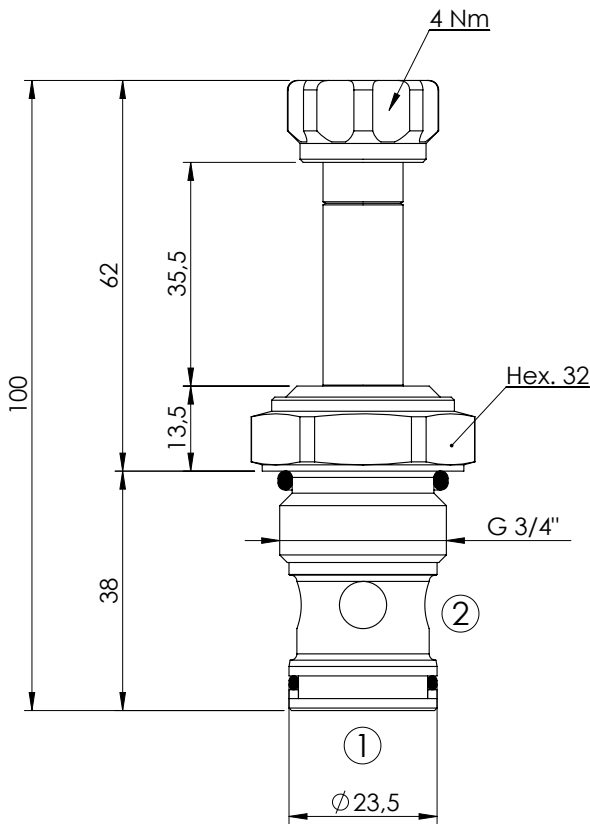


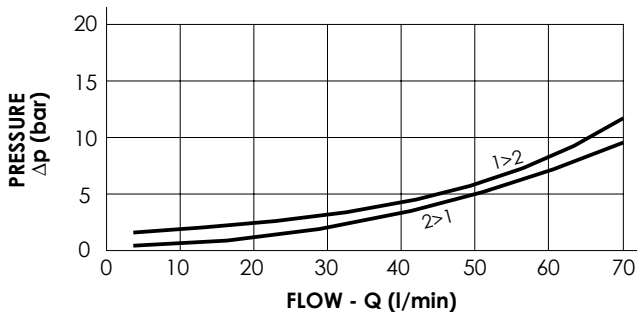








SOLENOID OPERATED CARTRIDGE		 ATLANTIC Fluid Tech													
CEBP-070-NAFN		PILOT OPERATED POPPET TYPE													
		 													
		SPECIFICATIONS <table><tr><td>Max. operating pressure:</td><td>350 bar</td></tr><tr><td>Rated flow:</td><td>70 l/min</td></tr><tr><td>Cavity:</td><td>VP000057</td></tr><tr><td>Weight:</td><td>0,18 kg</td></tr><tr><td>Min. voltage required:</td><td>90% of nominal</td></tr><tr><td>Coil type:</td><td>M7</td></tr></table>		Max. operating pressure:	350 bar	Rated flow:	70 l/min	Cavity:	VP000057	Weight:	0,18 kg	Min. voltage required:	90% of nominal	Coil type:	M7
Max. operating pressure:	350 bar														
Rated flow:	70 l/min														
Cavity:	VP000057														
Weight:	0,18 kg														
Min. voltage required:	90% of nominal														
Coil type:	M7														
		NOTES <table><tr><td>Installation torque:</td><td>54 - 66 Nm</td></tr></table>		Installation torque:	54 - 66 Nm										
Installation torque:	54 - 66 Nm														
		OPTIONS <table><tr><td>  Standard </td><td>  Push style override </td></tr></table>		 Standard	 Push style override										
 Standard	 Push style override														
ORDERING CODES															
Quick code	Description	Options													
CE000047	CEBP-070-NAFN-32-057-N350	Standard													
CE000048	CEBP-070-NAFE-32-057-N350	Push style override													