
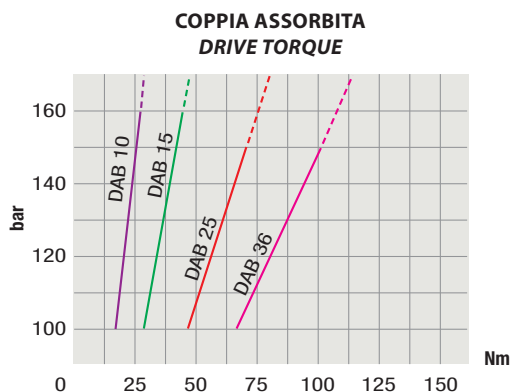
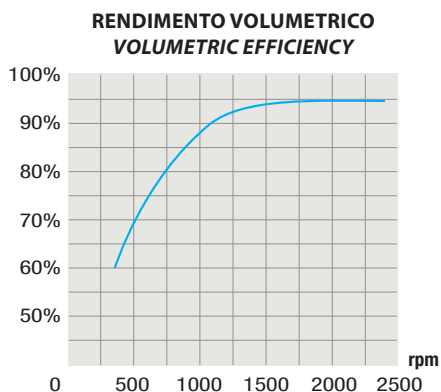
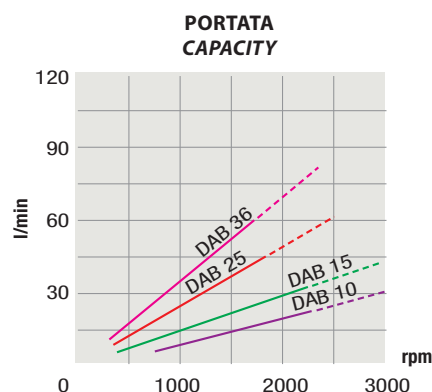


20 DAB XXX X 4 0 0 2 0

TIPO / TYPE			DAB 10	DAB 15	DAB 25	DAB 36
Cilindrata Displacement	Vg	cm ³ /n cm ³ /rev.	10	15	25	35
Pressione massima continua Max continuous operating pressure	P1	bar	180	140	120	100
Pressione massima intermittente Max intermittent operating pressure (max 30 s)	P2		200	160	150	120
Pressione massima di picco Max peak pressure (≤ 0.1 s)	P3		270	210	180	150
Velocità massima intermittente Max intermittent speed (P ≤ 20 bar)	n3	n/min r.p.m.	3000	3000	2500	2100
Velocità massima continua Max continuous speed (≤ P1)	n1		1500	1500	1500	1400
Velocità minima intermittente Min intermittent speed (≤ P2 x 0.5) (max 30 s)	n4		800	650	650	600

DIAGRAMMI / DIAGRAMS

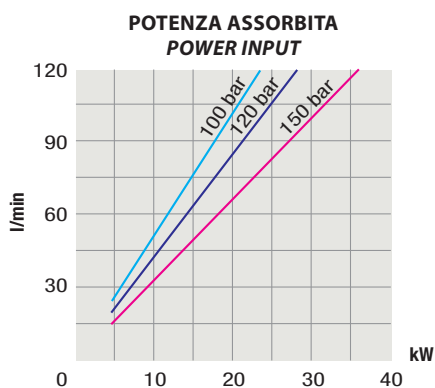

RILIEVI ESEGUITI CON OLIO ISO VG 46 A 50° C ($\nu = 30$ cSt)
THE ABOVE SPECIFICATIONS REFER TO OIL TYPE ISO VG 46 AT 50° C ($\nu = 30$ cSt)