

SERBATOIO COMPLETO DI VALVOLA A COM.ELETTRICO SENZA FINECORSO ELECTRIC TIPPING VALVE WITH TANK - WITHOUT END OF STROKE

FAMIGLIA / FAMILY **146**
CAPACITÀ / CAPACITY Lt **10/15**
VALVOLA / TIPPING VALVE **FE40**

99740013510




Serbatoio completo di valvola ad azionamento meccanico, per il comando di ribaltabili leggeri, con schema idraulico a centro aperto in accordo alle direttive CE.


- Valvola di ritegno e valvola di massima pressione registrabile incorporate;
- Predisposizione per segnalatore di pressione;
- Corpo valvola protetto da cataforesi nera, cursore nichelato e serbatoio verniciato con polveri epossidiche grigie (RAL 7020);
- Garantito per lavorare con olio a temperature -25÷80 °C, campo di viscosità 12÷100 cSt e grado di filtrazione 25 µm;

Oil tank with mechanically-activated tipping valve to suit light duty tipper trucks. Open centre hydraulic layout according to CE standards.

- Built-in adjustable safety valves.
- Ready for pressure signal switch mounting
- Cataphoresis coated valve body, nickel spool and tank painted with grey epoxy powder (RAL 7020);
- Guaranteed for working with oils at -25÷80 °C, viscosity range 12÷100 cSt and oil filtering level of 25 µm.

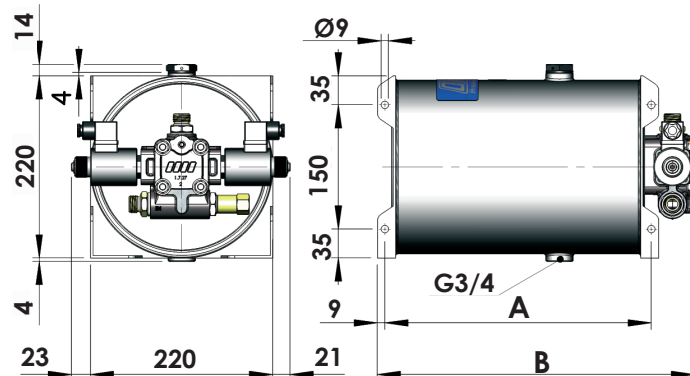

N°	Codice Code	Descrizione Description	Q.
1	50500300015	Dado M8 / Nut M8	4
2	50100700064	Rondella M8 / Washer M8	4
3	12100400572	Valvola 12V / Tipping valve 12V	1
	12100400581	Valvola 24V / Tipping valve 24V	
4	50700300235	Guarnizione / Gasket	1
5	51400211103	Serbatoio 10 l / Tank 10 l	1
	51400211158	Serbatoio 15 l / Tank 15 l	1
6	50900500015	Tappo sfiato / Breather cap	1

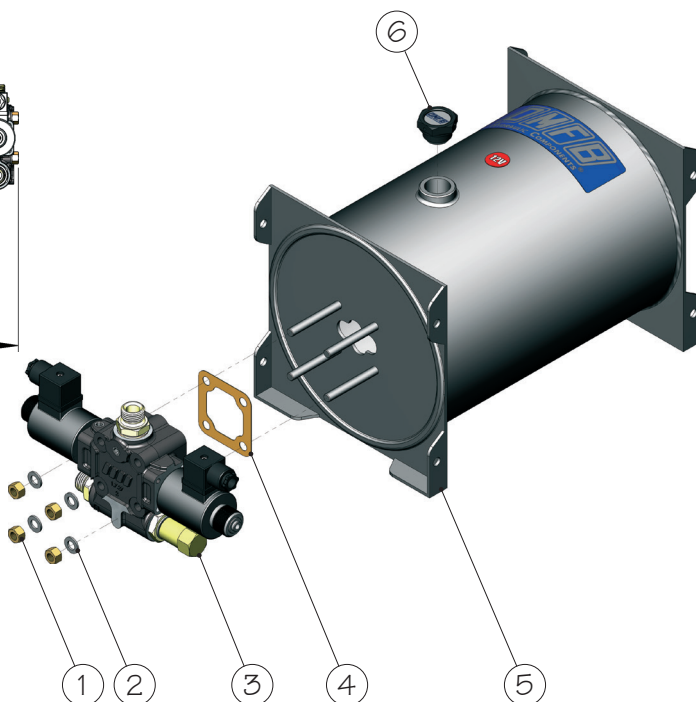

27/04/2021

99714602710 Rev: AC

Tipo Type	Codice ordinazione Order code	Capacità serbatoio Tank's capacity l	Portata valvola Valve Flow l/min	A mm	B mm	Pressioni Pressure values	
						Taratura standard Standard setting bar	Taratura massima Maximum setting bar
				DSE-10 CE 12V	14602710124	10	40
DSE-10 CE 24V	14602710240	322	382				
DSE-15 CE 12V	14602715129	15	472	532			
DSE-15 CE 24V	14602715245		472	532			

OMFB
HYDRAULIC COMPONENTS

O.M.F.B. S.p.A. Hydraulic Components
We reserve the right to make any changes without notice.
Edition 2004.09 No reproduction, however partial, is permitted.
Via Cave, 7/9 25050 Provaglio d'Iseo (Brescia) Italy Tel.: +39.030.9830611
Fax: +39.030.9839207-208 Internet:www.omfb.it e-mail:contatti@omfb.it

COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001:2015 =