

PRODUCT SHEET LEVEL GAUGE LV(T)



LV series visual level gauges permit direct verification of the fluid level contained into the tank.
 Distance "D" stated in the enclosed table, indicates the distance of the fixing holes whose diameter is "M".
 The design allows for an error of up to 4 mm, on the fixing hole centres during assembly; a new nylon black cover coating entirely the level gauge.
 These level gauges can be used with mineral oils, and various fluids.
 With the exception of model LV1 these gauges are also available with a thermometer.

TECHNICAL CHARACTERISTICS

Materials

Heads: glass reinforced nylon
 Transparent: "perbex"
 Bolts: galvanized steel
 Nuts: galvanized steel
 External protection by glass reinforced nylon

Temperature range
 from -20°C to +80°C


Max. pressure
 1 bar

Torque bolt tightening
 4 Nm

Thermometer

Bulb type with double calibrated scale °C and °F

Thermometer scale
 from 0°C to +80°C (from 32°F to 176°F)

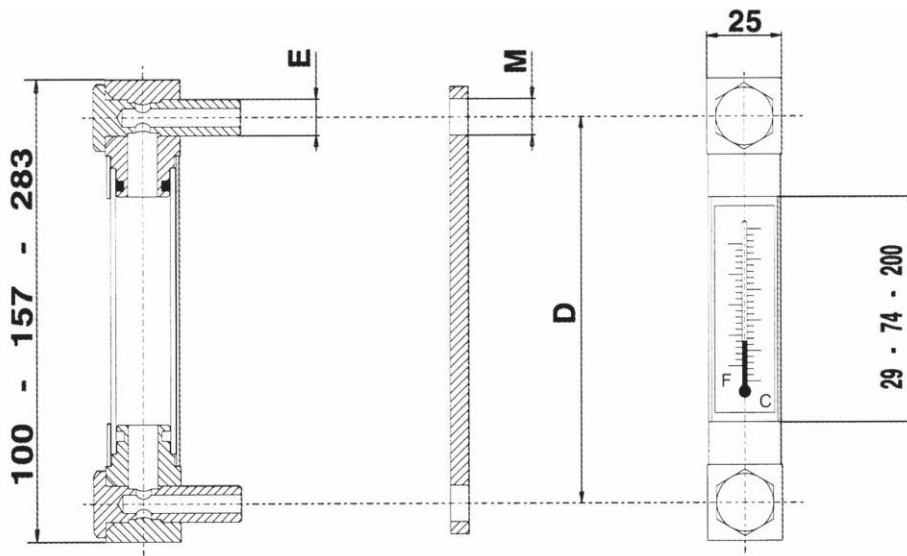

Ordering example

LV - 2 - T ———— T with thermometer
 Series

Optional:

base

- 1* D = 76 mm
- 2 D = 127 mm
- 3 D = 254 mm

* Not available with thermometer