

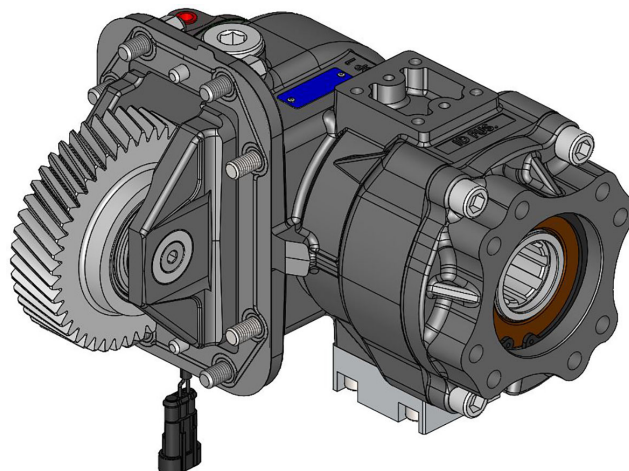


Lato destro
Right side

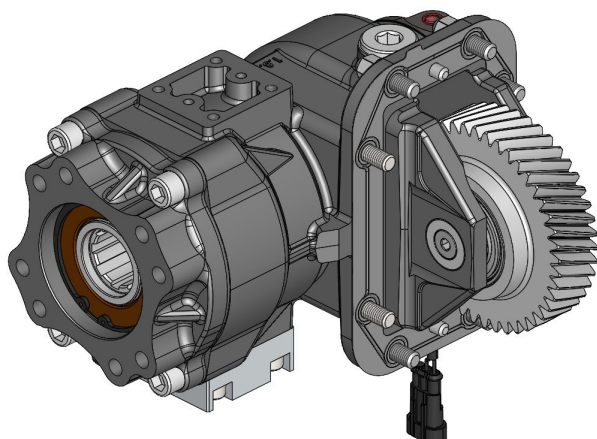

Technical drawing of the front view of a mechanical component, likely a pump or motor housing. The drawing shows a central circular opening with a flange, surrounded by a complex, multi-ported housing. Dimensions are provided in millimeters (mm). Key dimensions include: overall width 145 mm, overall height 195 mm, central opening diameter 80 mm, and various mounting hole diameters (8xM12). The drawing is labeled "Mozzo/Hub 8x32x36 (ISO14)".

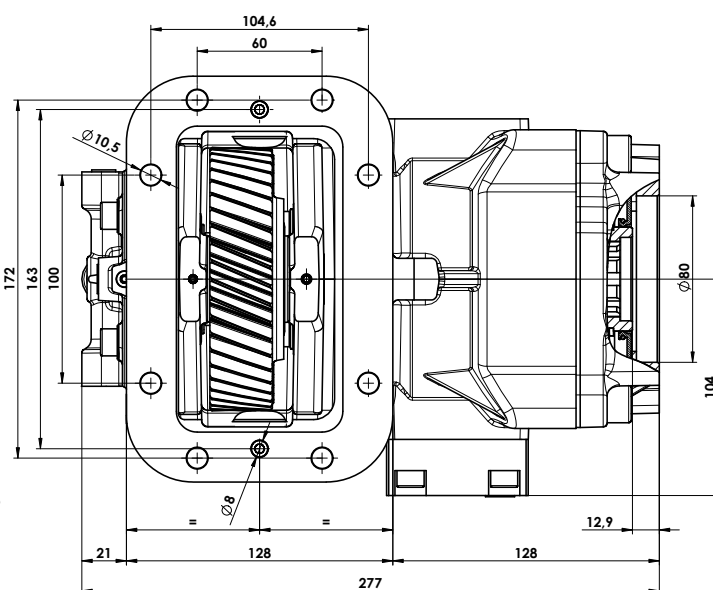


Tipo cambio <i>Gearbox type</i>	Codice PTO <i>PTO code</i>	Versione <i>Version</i>	Giri PTO a 1000 giri motore <i>PTO ratio@1000 eng.rpm</i>	Coppia massima <i>Max torque</i>	Rapporto interno <i>Internal ratio</i>	Lato montaggio <i>Mounting side</i>	Uscita <i>Output</i>	Rotazione <i>Rotation</i>	Kit di montaggio <i>Mounting kit</i>	Peso <i>Weight</i>
			<i>rpm</i>	<i>Nm</i>						<i>Kg</i>
ZF8AP POWERLINE	01082300174	17	1214	430	1:1,048	Destro <i>Right</i>	Posteriore <i>Rear</i>	Antioraria <i>Anticlockwise</i>	15400303786	30
	01082500172		1417	370	1:1,306					
	01083300172		1214	430	1:1,048	Sinistro <i>Left</i>				
	01083500170		1417	370	1:1,306					



99721082317 AD 01/04/2025

Condizioni di funzionamento / Working conditions


PTO 01082300174 - 01083300172

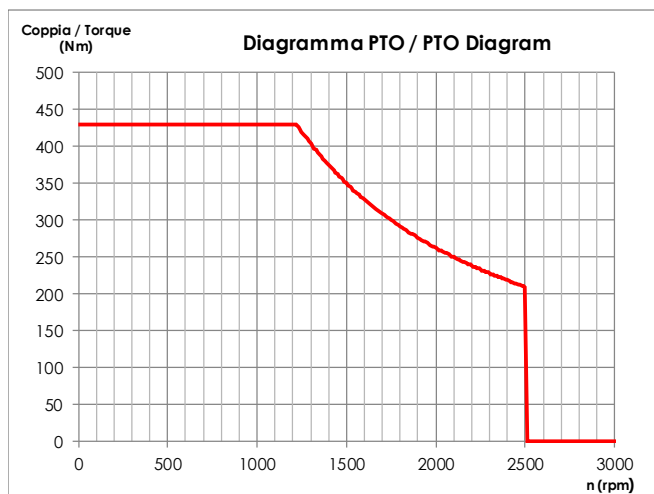


PTO 01082500172 - 01083500170

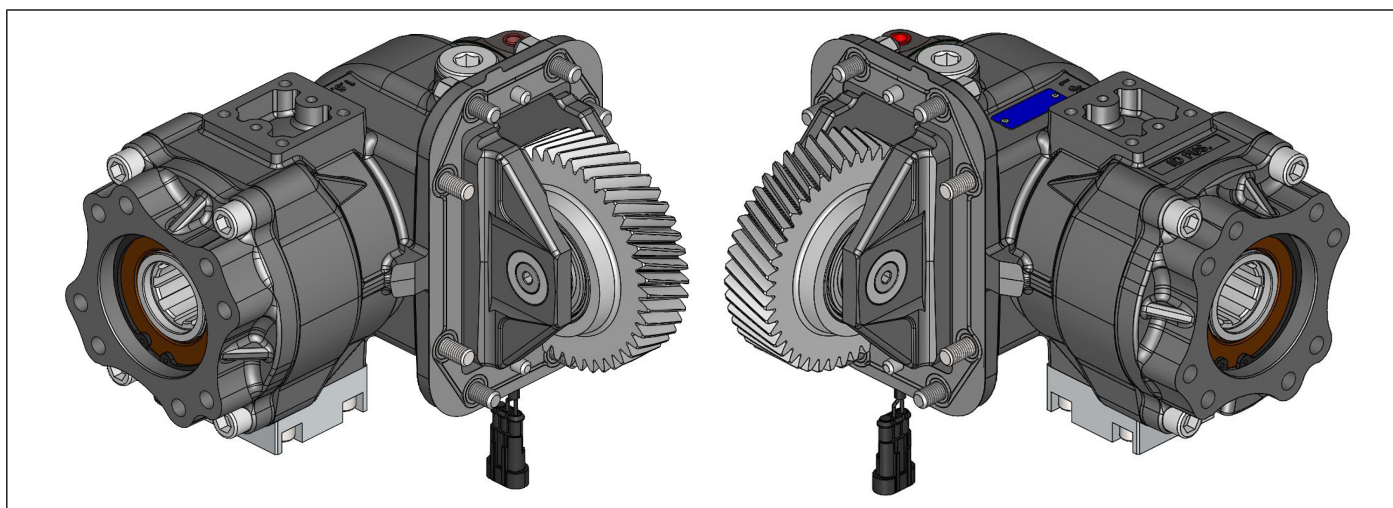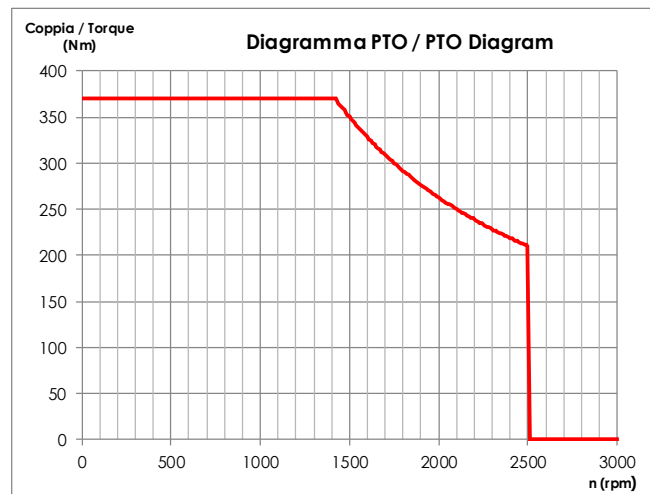

Particolari già compresi con la fornitura della PTO / Parts already included in the PTO supply

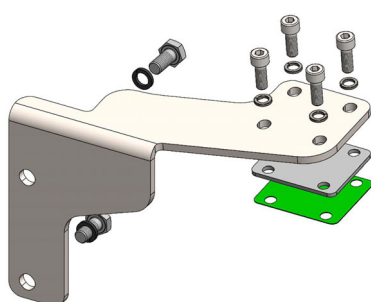

10300400249
Kit montaggio **LATO SINISTRO**
LEFT SIDE mounting kit

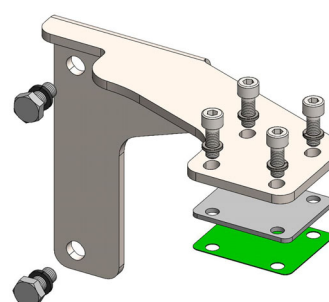

10300400230
Kit montaggio **LATO DESTRO**
RIGHT SIDE mounting kit




1140000964
Kit prigionieri, dadi e rondelle
Studs, nuts and washers



11491580159
Kit pressostato
Pressure switch kit

Momento peso / Bending moment

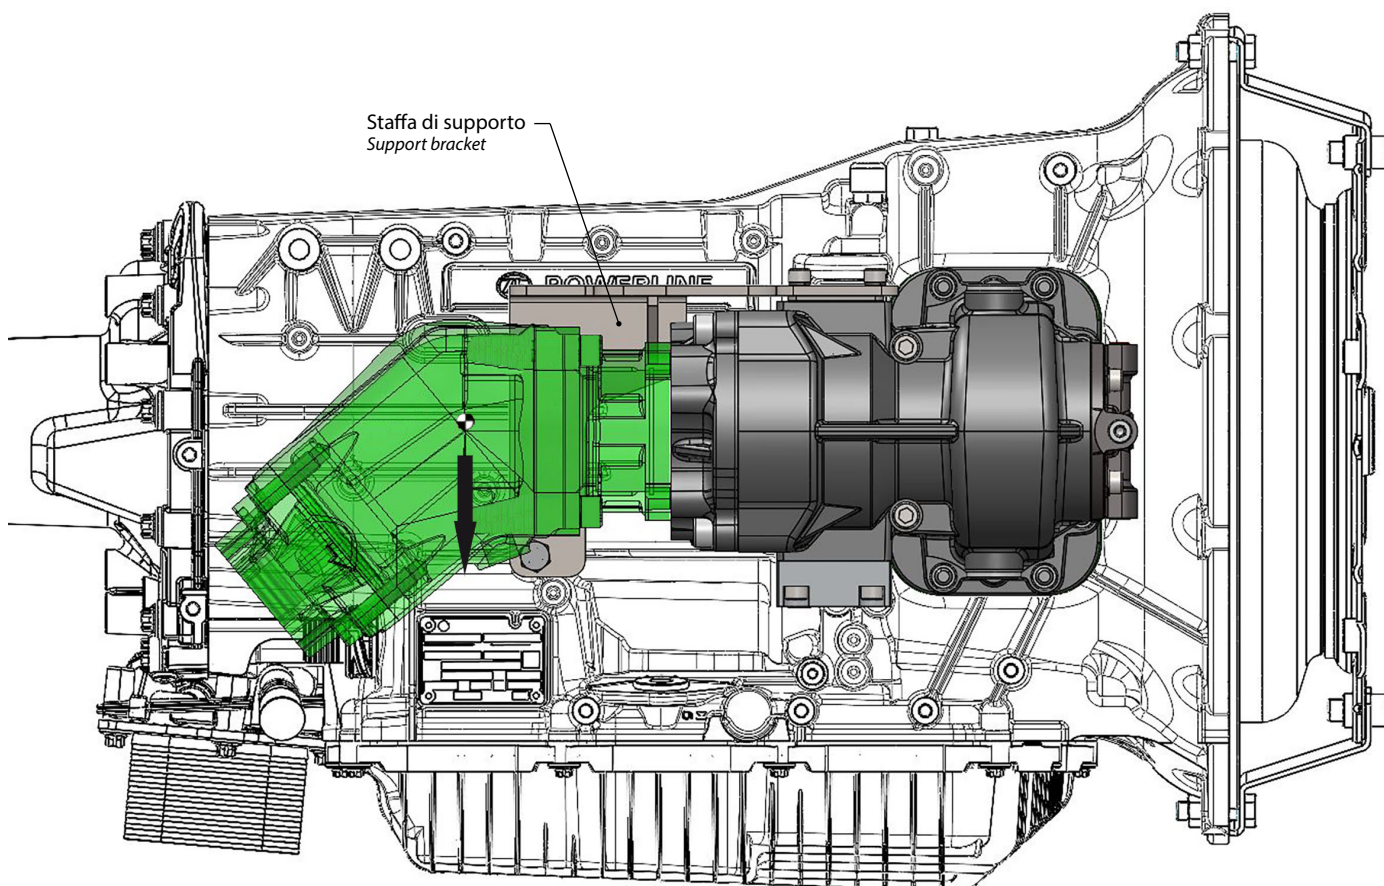

Il massimo momento peso ammesso alla flangia PTO è:
Maximum allowed bending moment at PTO output flange:

41 Nm



Non è ammesso il montaggio della PTO senza staffa di supporto.
PTO fitment without support bracket isn't allowed.

Se il momento peso **ECCEDE** il valore sopra riportato, **É IMPOSTO** l'utilizzo di ulteriori staffe di supporto a carico dell'allestitore.

*In case bending moment **EXCEEDS** the above value **IT'S MANDATORY** the use of additional support brackets on body builder's side.*